


Data sheet

Safety pressure relief controller SAVA (PN 25)

Description

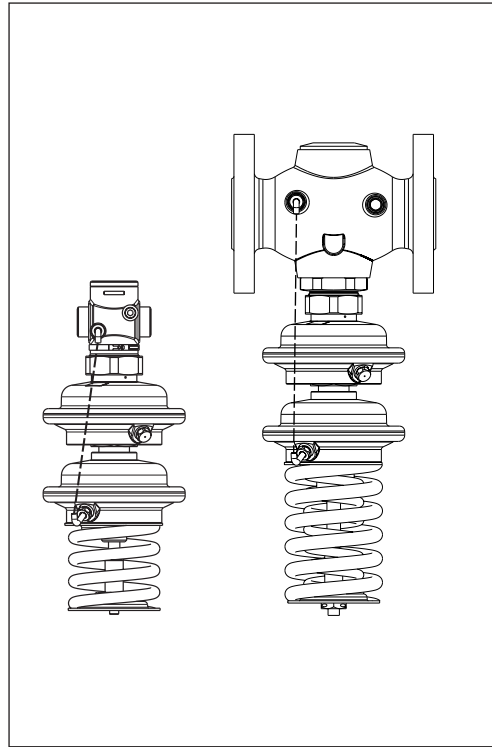

The controller is a self-acting safety pressure relief controller primarily for use in district heating systems. The controller is normally closed and opens on rising pressure. It is used for pressure relief control and as a protection against excess pressure in front of the valve.

The controller has a control valve, an actuator with two control diaphragms and a spring(s) for pressure setting.

Design-tested according to DIN 4747 (SÜV) and the AGFW guide lines.

Main data:

- DN 15 - 50
- k_{vs} 4.0 - 25 m³/h
- PN 25
- Setting range: 1.0 - 4.5 bar / 3.0 - 11 bar
- Temperature:
 - Circulation water / glycolic water up to 30%: 2 ... 150 °C
- Connections:
 - Ext. thread (weld-on, thread and flange tailpieces)
 - Flange

Ordering

Example:
Safety pressure relief controller,
DN 15, k_{vs} 4.0, PN 25, setting range
1.0 - 4.5 bar, t_{max} 150 °C, ext. thread

- SAVA DN 15 controller
Code No: **003H6675**

- Option:
- Weld-on tailpieces
Code No: **003H6908**

The controller will be delivered completely assembled, inclusive impulse tube between valve and actuator.

SAVA Controller

Picture	DN (mm)	k_{vs} (m ³ /h)	Connection	Δp setting range (bar)	Code No.	Δp setting range (bar)	Code No.	
	15	4.0	Cylindr. ext. thread acc. to ISO 228/1	1.0 - 4.5	003H6675	3 - 11	003H6681	
	20	6.3					G ¾ A	003H6682
	25	8.0					G 1 A	003H6683
	32	12.5					G 1¼ A	003H6684
	40	16					G 1¾ A	003H6685
	50	20					G 2 A	003H6686
	32	12.5	Flanges PN 25, acc. to EN 1092-2	1.0 - 4.5	003H6680	3 - 11	003H6687	
	40	20					G 2¼ A	003H6688
	50	25					G 2½ A	003H6689
								003H6690

Ordering (continuous)
Accessories

Picture	Type designation	DN	Connection	Code No.
	Weld-on tailpieces	15	-	003H6908
		20		003H6909
		25		003H6910
		32		003H6911
		40		003H6912
		50		003H6913
	External thread tailpieces	15	Conical ext. thread acc. to EN 10226-1	R 1/2" 003H6902
		20		R 3/4" 003H6903
		25		R 1" 003H6904
		32		R 1 1/4" 003H6905
	Flange tailpieces	15	Flanges PN 25, acc. to EN 1092-2	003H6915
		20		003H6916
		25		003H6917

Service kits

Picture	Type designation	Δp setting range (bar)	Code No.
	Actuator with setting spring	1.0 - 4.5	003H6846
		3 - 11	003H6847

Technical data
Valve

Nominal diameter	DN	15	20	25	32	40	50
k_{vs} value	m ³ /h	4.0	6.3	8.0	12.5	16/20 ¹⁾	20/25 ¹⁾
Cavitation factor z *		≥ 0.6					
Nominal pressure	PN	25					
Max. differential pressure	bar	20			16		
Medium		Circulation water / glycolic water up to 30%					
Medium pH		Min. 7, max. 10					
Medium temperature		2 ... 150 °C					
Connections	valve	Thread			Thread and flange		
	tailpieces	Weld-on and flange			Weld-on		
		External thread			-		
Materials							
Valve body	thread	Red bronze CuSn5ZnPb (Rg5)			Ductile iron EN-GJS-400-18-LT (GGG 40.3)		
	flange	-					
Valve seat		Stainless steel, mat. No. 1.4571					
Valve cone		Dezincing free brass CuZn36Pb2As					
Sealing		EPDM					


* $k_v/k_{vs} \leq 0.5$ at DN 25 and higher

¹⁾ Flange valve body

Actuator

Actuator size	cm ²	54
Nominal pressure	PN	25
Diff. pressure setting ranges and spring colours	bar	1.0 - 4.5
		3 - 11
		blue
		black, green
Materials		
Actuator housing	Upper casing of diaphragm	Stainless steel, mat. No.1.4301
	Lower casing of diaphragm	Dezincing free brass CuZn36Pb2As
Diaphragm		EPDM
Impulse tube		Copper tube Ø6 × 1 mm



Application principles

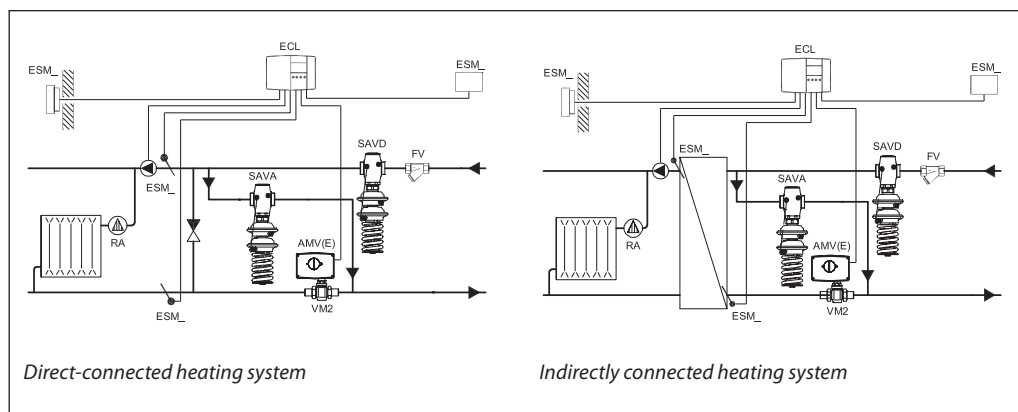


Installation positions

Up to medium temperature of 100°C the controllers can be installed in any position.

For higher temperatures the controllers have to be installed in horizontal pipes only, with a pressure actuator oriented downwards.

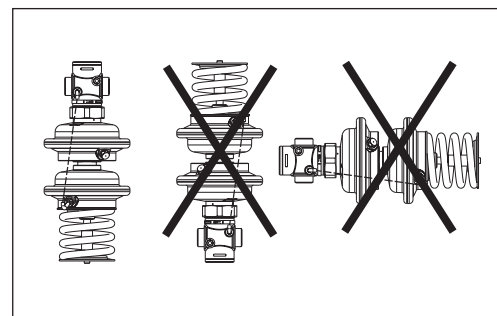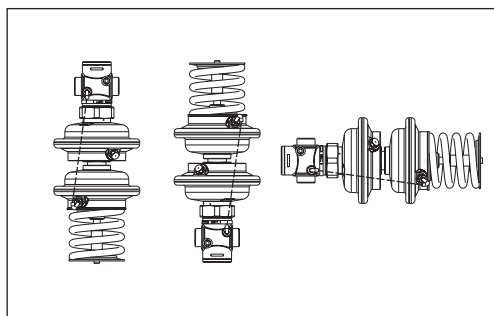

Pressure temperature diagram

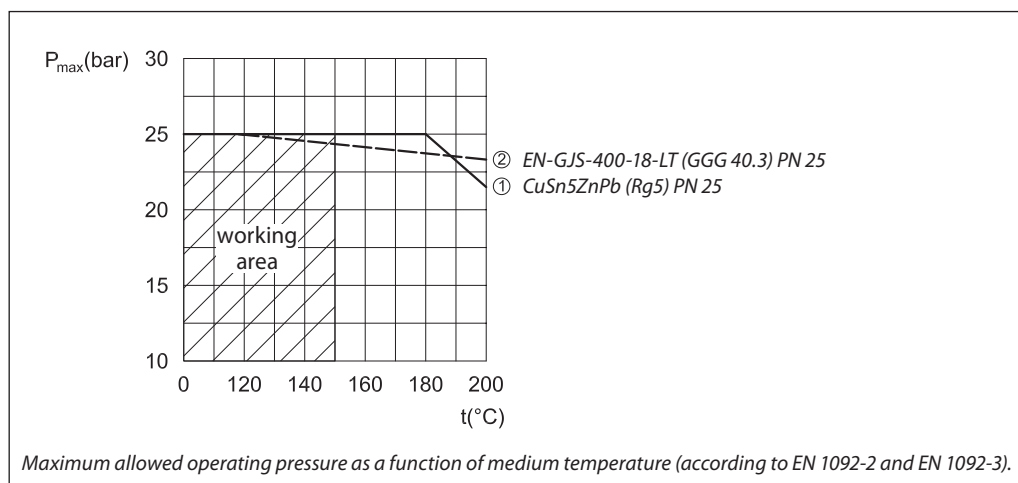

Sizing

Given data:

$$Q_{\max} = 2.2 \text{ m}^3/\text{h}$$

$$\Delta p_{\min} = 1.4 \text{ bar}$$

Nominal pressure PN 25


k_v value is calculated according to formula:

$$k_v = \frac{Q_{\max}}{\sqrt{\Delta p_{\min}}} = \frac{2.2}{\sqrt{1.4}}$$

$$k_v = 1.9 \text{ m}^3/\text{h}$$

Solution:

The example selects SAVA DN 15, k_{vs} value 4.0, with pressure setting range 1.0 - 4.5 bar.

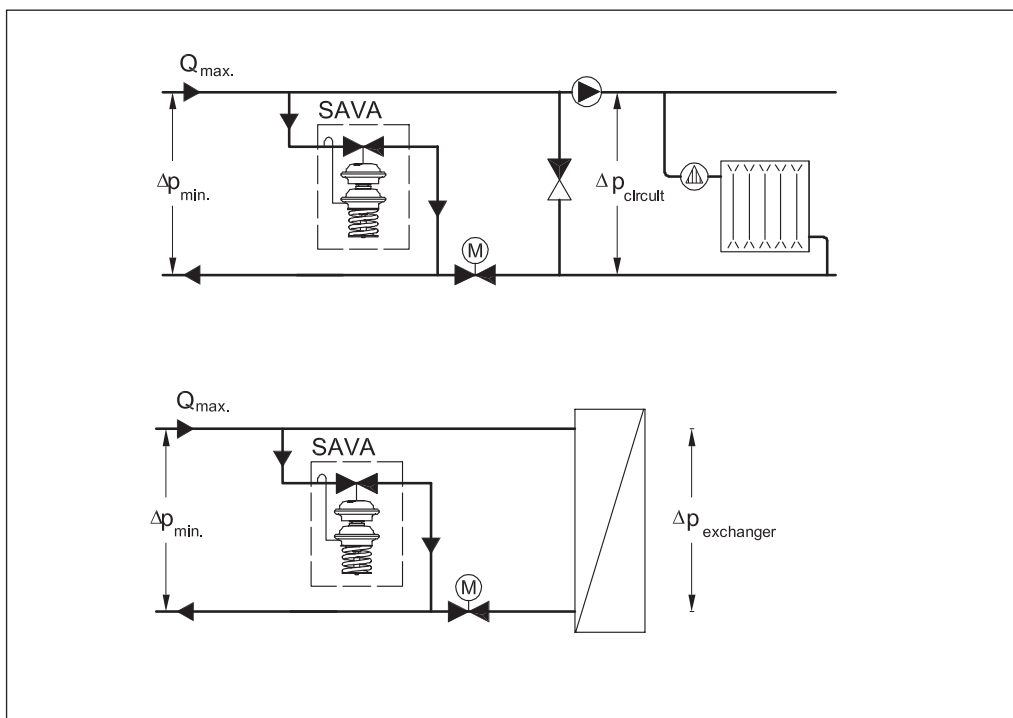


Sizing of Safety Valve SV or Safety Pressure Relief Valve SÜV

If pressure protection is performed by a safety pressure reduction controller (SAV) the downstream safety units (safety valve SV or safety pressure relief valve SÜV) must be designed for a flow rate of at least 1% of the k_{vs} value of the safety pressure reduction controller (SAV). More details see in standard DIN 4747-1.

Design

1. Valve body
2. Valve insert
3. Pressure relieved valve cone
4. Valve stem
5. Safety diaphragm
6. Control diaphragm
7. Setting spring for pressure control
8. Adjuster for pressure setting, prepared for sealing
9. Union nut
10. Connection stem
11. Air space bore
12. Upper casing of diaphragm
13. Lower casing of diaphragm
14. Threaded joint with sintering filter
15. Impulse tube

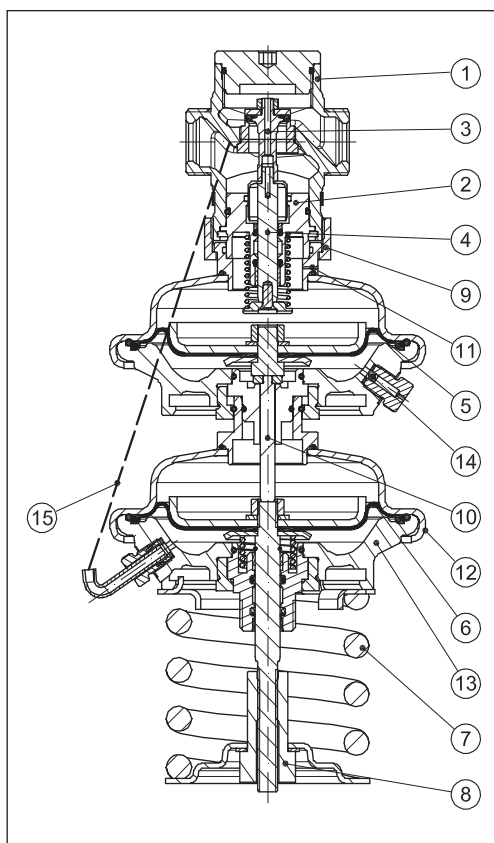

Function

Mode of Operation

The safety pressure relief controller controls the pressure and protects the system against excess pressure in front of the valve. The valve cone is softsealed and pressure balanced.

Control function

The pressure in front of the control valve is being transferred through the impulse tube into the lower (+) chamber of the control diaphragm. The pressure generates a force on the control diaphragm which counteracts the force of the setting spring. This difference in forces acts through the connection stem and the valve stem upon the valve cone. The valve opens when the pressure in front of the valve rises and closes when the pressure decreases.

Safety function in case of diaphragm break


If the control diaphragm breaks, pressure gets in the two intermediate chambers. This pressure acts upon the safety diaphragm and causes the valve to open. The control function does not operate. A slight water leakage at the threaded joint on the safety diaphragm indicates a break of the control diaphragm.

Settings

Pressure setting

Pressure setting is being done by the adjustment of the setting spring for pressure control. The adjustment can be performed on the basis of pressure adjustment diagram (see relevant instructions) and/or pressure indicator.

Dimensions

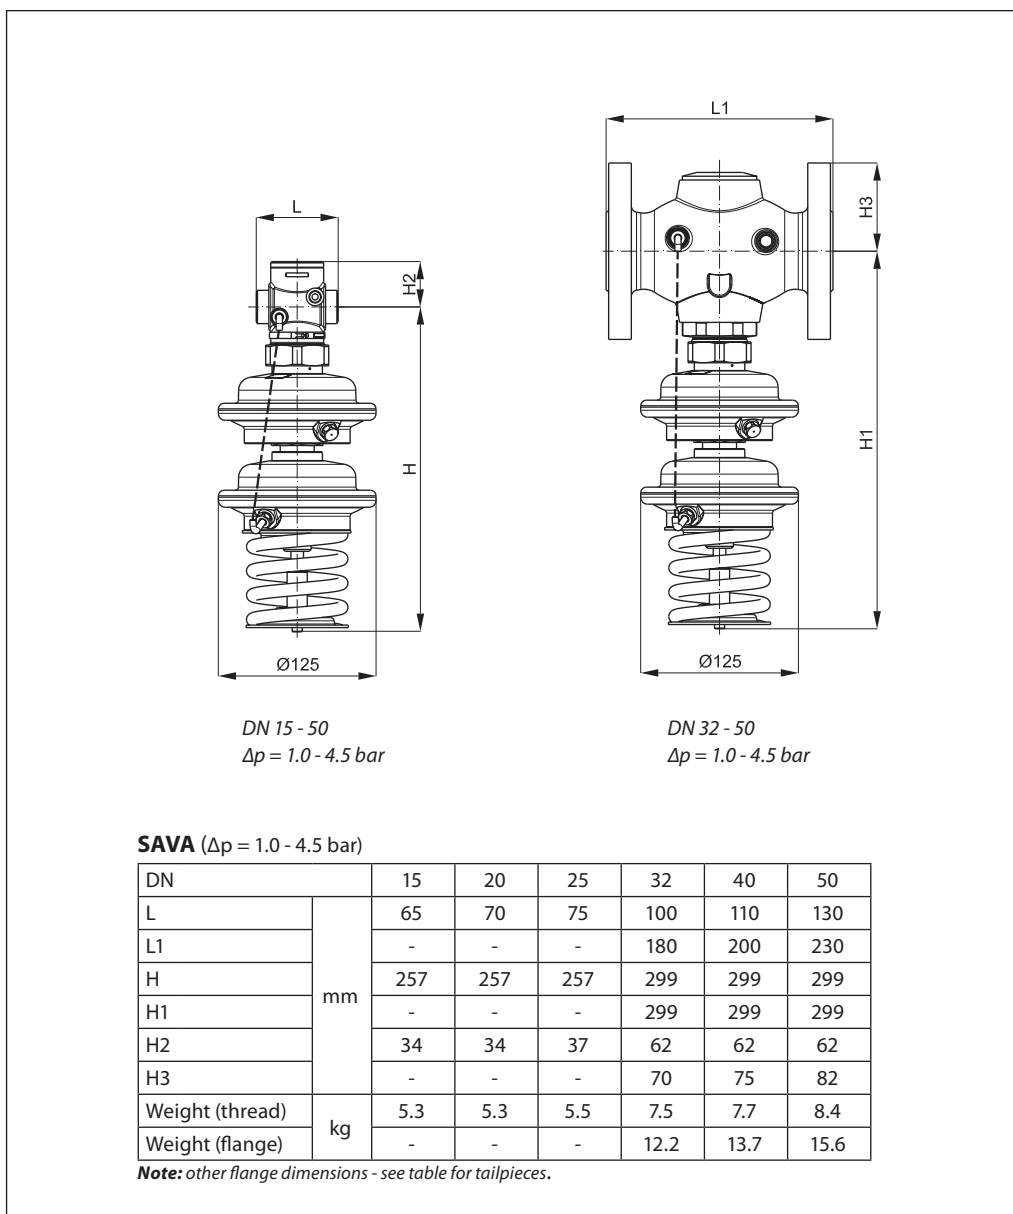

Dimensions (continuous)

DN 15 - 50
 $\Delta p = 3 - 11 \text{ bar}$

DN 32 - 50
 $\Delta p = 3 - 11 \text{ bar}$

SAVA ($\Delta p = 3 - 11 \text{ bar}$)

DN	15	20	25	32	40	50
L	65	70	75	100	110	130
L1	-	-	-	180	200	230
H	313	313	313	355	355	355
H1	-	-	-	355	355	355
H2	34	34	37	62	62	62
H3	-	-	-	70	75	82
Weight (thread)	5.4	5.4	5.6	7.7	7.8	8.5
Weight (flange)	-	-	-	12.3	13.9	15.8

Note: other flange dimensions - see table for tailpieces.

DN	15	20	25	32	40	50
SW	32 (G 3/4A)	41 (G 1A)	50 (G 1 1/4A)	63 (G 1 3/4A)	70 (G 2A)	82 (G 2 1/2A)
d	21	26	33	42	47	60
R ¹⁾	1/2	3/4	1	1 1/4	-	-
L1 ²⁾	130	150	160	-	-	-
L2	131	144	160	177	-	-
L3	139	154	159	184	204	234
k	65	75	85	100	110	125
d ₂	14	14	14	18	18	18
n	4	4	4	4	4	4

¹⁾ Conical ext. thread acc. to EN 10226-1
²⁾ Flanges PN 25, acc. to EN 1092-2

